
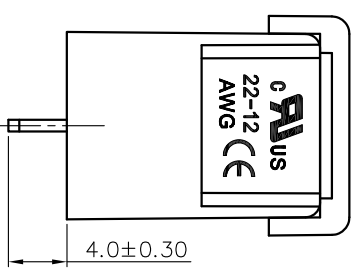
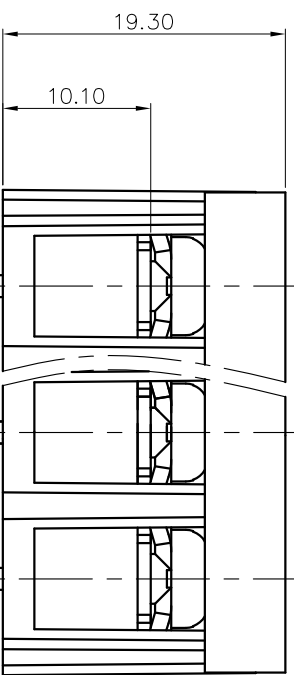



REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

(W/O COVER)

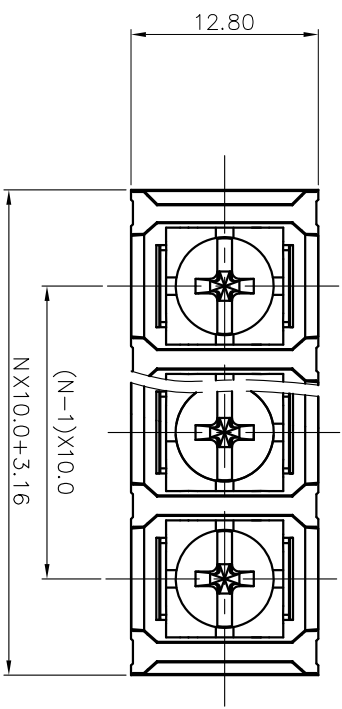


- NOTES1:
- UL Standard
 - 1. Rated voltage/current : 300V / 20A
 - 2. Torque value : M4 , 10.53lb.in
 - 3. Wire range : 22~12AWG
- NOTES2:
- 1. Dimension shall be interpreted per ASME Y14.5-2009
 - 2. Pitch : 10mm, Poles : N=02~22P
 - 3. Withstanding voltage : AC1600V/1min
 - 4. Operating temperature : -40C~+105C
 - 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range			mm	mm
	Over	TO	Under		
6	10	TO	60	100	150
10	TO	TO	TO	TO	TO
24	30	60	100	150	±2°
±0.15±0.20	±0.30±0.30	±0.50±0.70	±1.00	±1.30	±2°

6. RoHS Compliance

DG58C-B - XXP - 1Y - 00A (H)
 (Series No.) (Poles) (Single Pitch) (Color) :1.(Grey)
 (RoHS)
 00A-(Standard)

- 2.(Blue)
- 3.(Black)
- 4.(Green)
- 5.(Orange)
- 6.(Red)
- 7.(Transparent)
- 8.(Yellow)
- 9.(White)

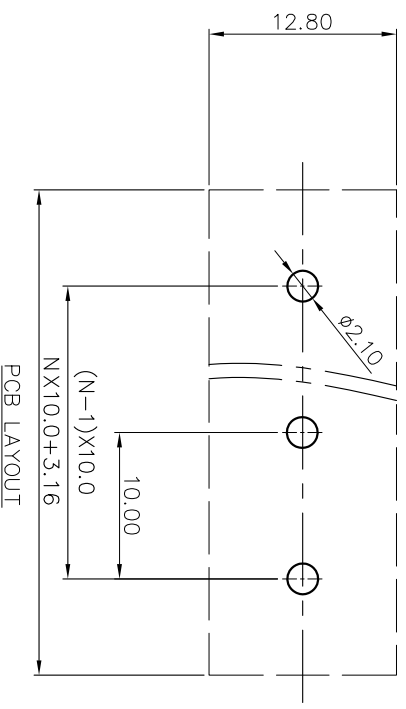

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	TITLE:	CUSTOMER DRAWING
CHKD.:	/	DRAWING NO.:	/
DRFT.:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1